


# LED WALL PACK LIGHT

## INSTALLATION REQUIREMENTS

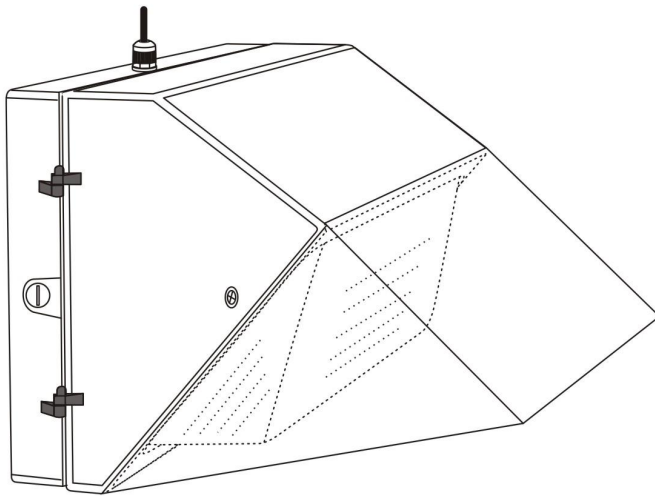


### To customers:

Thank you for your support to environmental protection and purchase our LED products, please read this manual carefully before using, and keep the manual.

### Features/Uses:

- The Housing utilizes die casting aluminum under alloy high pressure, compact structure, strong and corrosion-resistant.
- The clear cover utilizes hard pressed borax glass, refraction and soft light.
- The new silicone rubber seals, high temperature 250 ° or more, ensure effective non-aging.
- The Lamps utilizes the electrostatic spray, high temperature performance, beautiful and durable.
- Suitable for outdoor walls, tunnels, underpasses, elevated Bridges and so on.

### Dimension:

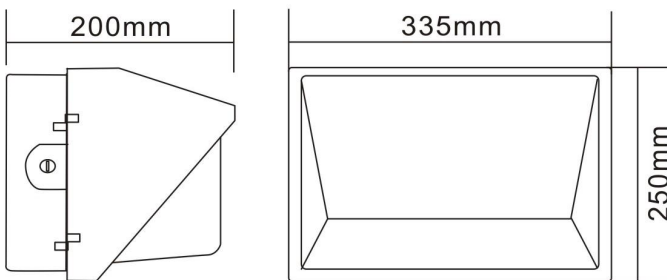

### Warning:

- Users are required to install the product under the instructions.
- When you maintain or inspect lamps, please disconnect the power first for safety.
- Shedding, electric leakage and electric shock will occur under the improper installation.
- Risk of injury of product damage, please do not transform the Lamps or self-adjusting the internal components.

### Wiring:




**Disconnect the power!**

The color of the power bus


L:( Live wire) Black  
 GND:( Ground) Yellow-Green  
 N:( Neutral line) White

e.g. Power cord shall connected inside a junction box which provides a suitable strain relief.

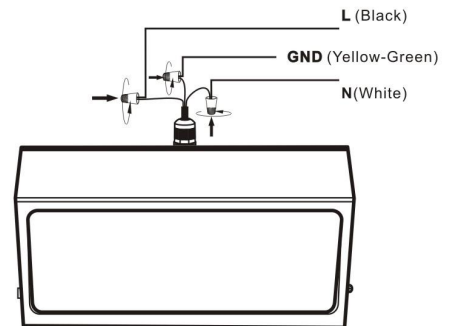


Put the L / GND / N into wiring cap, rotation of the locking cap and turn on the power.


### Installation:

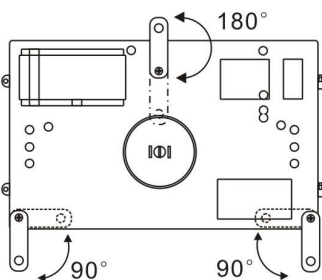

1. Rotating the three iron brackets.

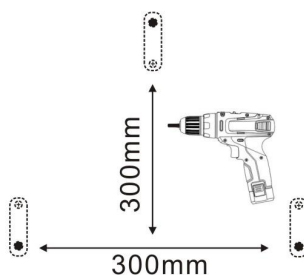

2. Marking and Drilling wall, the distance between the three brackets is approximately equal to 300mm.

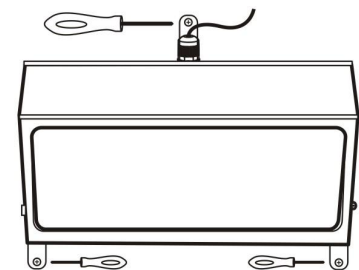

3. Use the screws to fix the three brackets and turn on the power.