


LED WORKSHOP LIGHT (120LM/W)

- DLC, ETL and RoHS listed
- Patented product, independent design
- Sling rope installation, simple and convenient
- Double tubes connected design, elegant appearance
- Equipped with pull switch, can turn on/off separately
- LM 80 light source, low luminous decay, long life, 5 years warranty



LED LIGHTS

[Installing Manual](#)

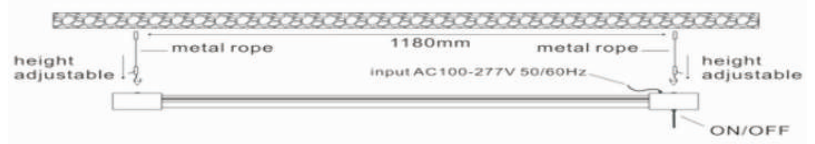

Specifications

Model No.	SN2T8B-06	SN2T8B-09	SN2T8B-12
Length	2FT	3FT	4FT
Power	16W	28W	32W
Voltage	120VAC	120VAC	120VAC
Frequency	50-60Hz	50-60Hz	50-60Hz
PF	>0.9	>0.9	>0.9
THD	<23%	<23%	<23%
CCT	3000K,4000K,5000K	3000K,4000K,5000K	3000K,4000K,5000K
CRI(Ra)	80+	80+	80+
Efficacy (clear)	120LM/W(5000K)	120LM/W(5000K)	120LM/W(5000K)
Efficacy (frosted)	110LM/W(5000K)	110LM/W(5000K)	110LM/W(5000K)
Lumens (clear)	1900LM(5000K)	3300LM(5000K)	4000LM(5000K)
Lumens (frosted)	1760LM(5000K)	3100LM(5000K)	3600LM(5000K)
LED Model	SMD2835	SMD2835	SMD2835
LED Quantity	120PCS	144PCS	240PCS
Beam Angle (clear)	120°	120°	120°
Beam Angle(frosted)	160°	160°	160°
Operating Temp.	-40°-122°F	-40°-122°F	-40°-122°F
Lifespan	50,000H	50,000H	50,000H
IP Rating	IP 40	IP 40	IP 40
Certificates	cETL,ETL,RoHS	cETL,ETL,RoHS	DLC,cETL,ETL,RoHS
Warranty	5 years	5 years	5 years
Installation	Sling rope mounted	Sling rope mounted	Sling rope mounted
Product Size	L600*W94*H35mm	L900*W94*H35mm	L1200*W94*H35mm
Product N.W.	0.37KG	0.56KG	0.73KG
Packing Method	12PCS/box	12PCS/box	12PCS/box
Pack Size	L620*W240*H350mm	L920*W240*H350mm	L1220*W240*H350mm
Carton G.W.	9.0KGS	13.5KGS	18.0KGS



Applications



- Production Lines
- Supermarkets and other indoor places