

LED WALL PACK LIGHT


- DLC, ETL and RoHS listed
- Highlight 2835 LED
- No strobe power
- Lightweight design of product
- More easy and safety installation
- High efficiency & good heat radiation
- LM 80 light source, low luminous decay, long life, 5 years warranty



LED LIGHTING

Specifications

Model No.	WK-36W	WK-60W	WK-72W
Power	36W	60W	72W
Voltage	100-277VAC	100-277VAC	100-277VAC
Frequency	50-60Hz	50-60Hz	50-60Hz
PF	>0.9	>0.9	>0.9
THD	23%	23%	23%
CCT	5500K(3000K,4000K)	5500K(3000K,4000K)	5500K(3000K,4000K)
CRI(Ra)	80+	80+	80+
Efficacy	110LM/W	110LM/W	110LM/W
Lumens	4000LM	6600LM	7900LM
LED Model	SMD2835	SMD2835	SMD2835
LED Quantity	126PCS	216PCS	252PCS
Beam Angle	90°	90°	90°
Operating Temp.	-40°-122°F	-40°-122°F	-40°-122°F
Lifespan	50,000H	50,000H	50,000H
IP Rating	IP 65	IP 65	IP 65
Certificates	DLC,cETL,ETL,RoHS	DLC,cETL,ETL,RoHS	DLC,cETL,ETL,RoHS
Warranty	5 years	5 years	5 years
Installation	Solid wall mounted	Solid wall mounted	Solid wall mounted
Product Size	L335*W250*H200mm	L335*W250*H200mm	L335*W250*H200mm
Product N.W.	5.0KGS	5.0KGS	5.0KGS
Packing Method	1PC/box	1PC/box	1PC/box
Pack Size	L400*W300*H230mm	L400*W300*H230mm	L400*W300*H230mm
Carton G.W.	6.0KGS	6.0KGS	6.0KGS

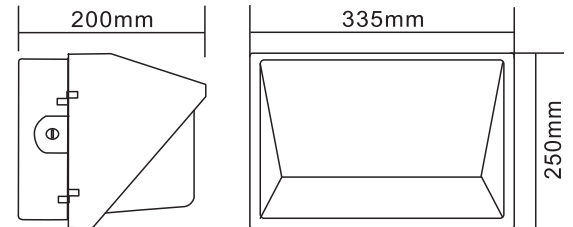

Applications

- Outdoor Walls
- Corridors of residential areas
- Villas
- Hotels
- Factories
- Garden scenic spots, etc.

